


FINAL BACKFILL MATERIAL OPTIONS:

- NATIVE SOIL PER SECTION 601 (TYPE B ONLY)
- ABC PER SECTION 702 (TYPE B ONLY)
- 1/2-SACK CLSM PER SECTION 728


**SECTION VIEW**

**TYPE A PAVEMENT REPAIR**




- NOTES:
1. DIMENSIONS ARE NOMINAL.
  2. EDGES SHALL BE CUT TO A NEAT VERTICAL FACE.
  3. PLACE CLSM BACKFILL IN ACCORDANCE WITH SECTION 604.
  4. PLACE AGENCY-APPROVED ASPHALT CONCRETE IN MAXIMUM 2" LIFTS.
  5. REPAIR ALL CRACKS OR SAWCUT OVERCUT PER SECTION 337.

**TYPE B PAVEMENT REPAIR**




DRILLED/CORED PILOT HOLE IF NEEDED

- NOTES:
1. CUT, REMOVE AND REPLACE PAVEMENT. PLUG IN ACCORDANCE WITH SECTION 355.
  2. PLACE BACKFILL IN ACCORDANCE WITH SECTION 355.
  3. BONDING MATERIAL SHALL BE AS SPECIFIED IN SECTION 708.

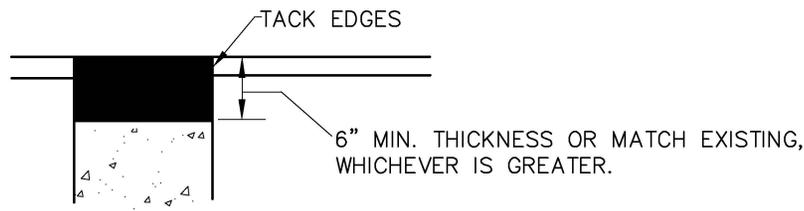

**SECTION A-A**

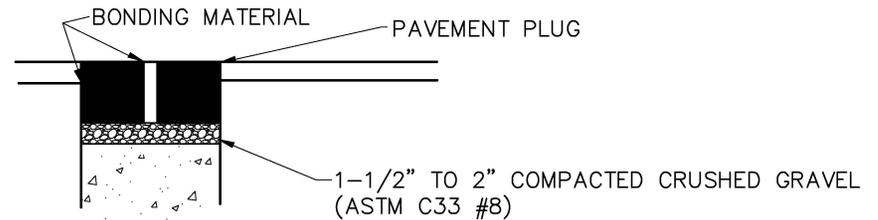

**SECTION A-A**

DETAIL NO.

**212**



**STANDARD DETAIL  
ENGLISH**

**UTILITY POTHOLE REPAIR**

REVISED

08-21-2020

DETAIL NO.

**212**