

Standard Fiberglass Manhole Ladtech Adjustment Ring Setup

(Applicable to both LFM and Containment Solutions)



Frame & Cover (not shown)


30" x 1/4" Spacer Ring

30" Adjustment Ring(s) installed with locking ring downward

Fiberglass Manhole Transition Ring 32" x 32" x 3" Tall (locking ring removed see below)

32" x 1/4" Spacer Ring(s) - Typically 1-3 or as required to ensure no weight is on chimney (see below)

12" MIN, 18" MAX Adjusting Rings Measured above Transition Ring (or top of chimney)

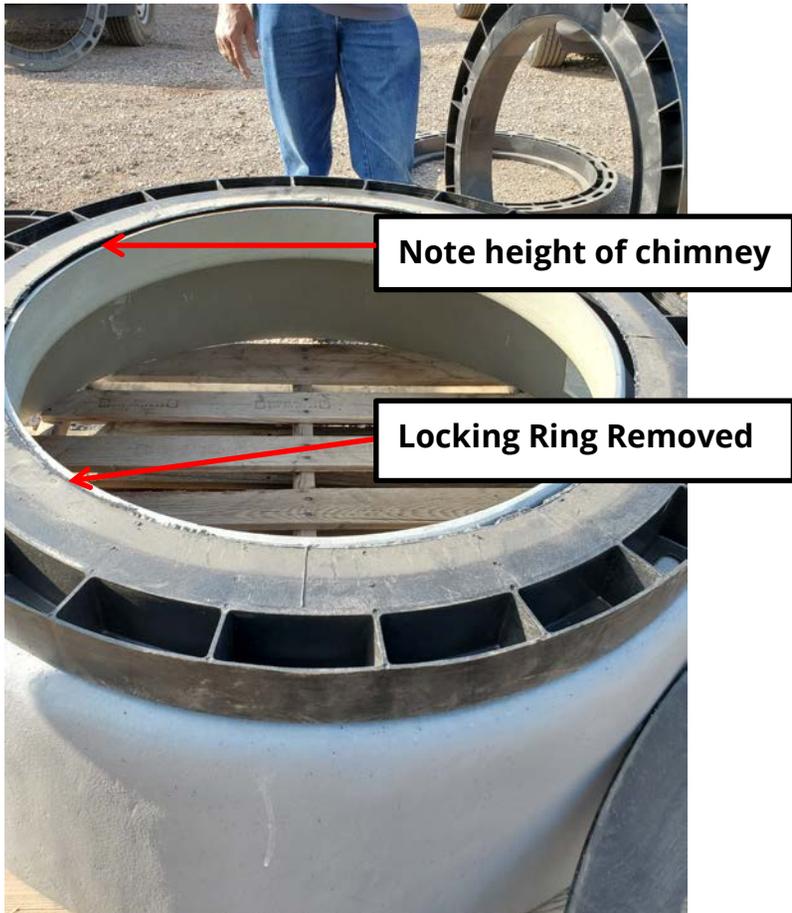

**Fiberglass Manhole Transition Ring
32" x 32" x 3" Tall (locking ring
removed)**



**Tracer Wire Install (refer to C-408)
Feed wire through ring where
shown, then through 1st
adjustment ring coming out just
above chimney. No crimping.**

