

BIOSWALE SECTION

GENERAL NOTES (BIOSWALE):

1. VEGETATION SHOULD BE OFFSET FROM CONCENTRATED FLOW.
2. SELECTED LANDSCAPE PLANTS SHOULD BE DROUGHT TOLERANT AND REFLECT RECOMMENDATIONS PROVIDED IN SECTION 795.7 / DRIP IRRIGATION WILL BE PROVIDED BY A TEMPORARY OR PERMANENT IRRIGATION SYSTEM
3. DO NOT PLANT OVER THE OPTIONAL UNDERDRAIN (IF INSTALLED).

Suggest the following:



5 FEET MINIMUM OR AS SHOWN IN THE PROJECT PLANS

A MINIMUM OF 5 FEET

IN ACCORDANCE WITH

Make as a separate note


SHALL

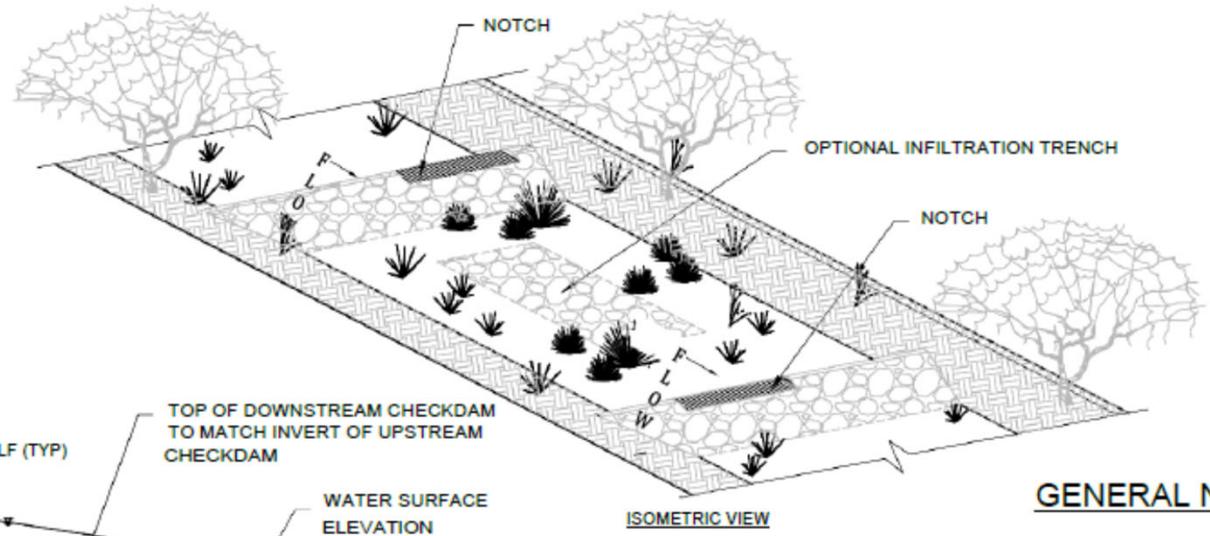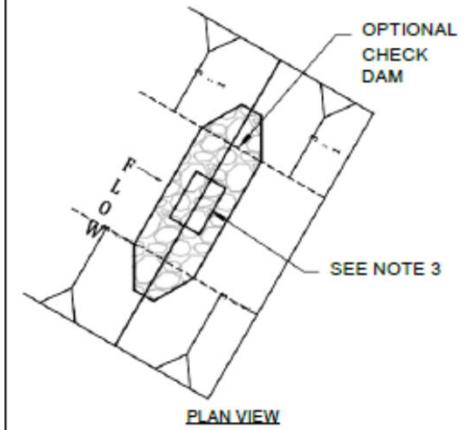

GENERAL NOTES (CHECKDAM):

1. OPTIONAL CHECK DAM IS MEANT TO DISPERSE DURING HIGHER FLOWS, SEE SECTION 640.3.3 OF SPECIFICATIONS.
2. D50 SIZE DETERMINED BY THE DESIGN REPORT.
3. NOTCHES SHALL BE OFFSET FROM ONE ANOTHER.
4. DEDICATED OUTFLOW REQUIRED FOR THIS FEATURE.
5. OPTIONAL ROCK CHECK DAM TO BE LOCATED TO REDUCE VELOCITIES PER DESIGN REPORT.
6. RIPRAP AND ROCK MULCH REQUIRED WHEN VELOCITIES EXCEED TABLE 6.2 OF THE FLOOD CONTROL DISTRICT OF MARICOPA COUNTY HYDRAULICS MANUAL.

1. ROCK CHECK DAM (IF INSTALLED) SHALL DISPERSE HIGH FLOWS AND BE INSTALLED IN ACCORDANCE WITH SECTION 640.3.3 AND THE PROJECT PLANS/SPECIFICATIONS.
2. RIPRAP SHALL BE IN ACCORDANCE WITH SECTION 644.
3. NOTCHES SHALL BE OFFSET FEET FROM ONE ANOTHER.
4. A DEDICATED OUTFLOW SHALL BE INSTALLED AS SHOWN ON THE PROJECT PLANS/SPECIFICATIONS.

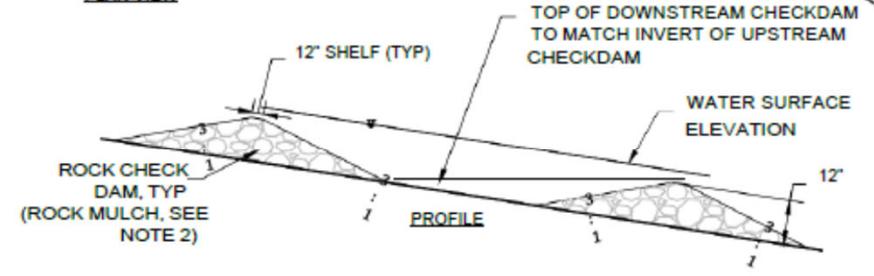

OPTIONAL ROCK CHECKDAM